


Set up for Alabama or Alaska frame tents

1. Lay out frame and check that all the parts are present.
2. Connect the roof frame together. Do not connect the side poles.
3. Lay out the tent canvas to one side of the frame and pull it across the roof frame.
4. Starting on one side of the tent, connect the side tubes to the frame.
(Ensure that the weight is evenly distributed. DO NOT allow the entire weight to rest On one pole or at one end!)
5. Insert the side poles on the opposite side.
6. Close all the zippers, straighten the canvas and peg down on the outside

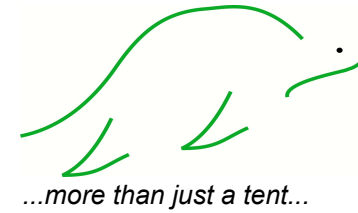

**Please always ensure that your tent is safely pegged to the ground
guy ropes and pegs should be marked/tagged to avoid tripping over in the dark**

Contents:

- 1 x tent canvas
- 1 x steel frame (see enclosed layout plan)
- guy ropes and pegs
(rolled into the tent canvas)


Inner tent Alabama

When using the inner tent of the Alabama with a **28mm** frame always ensure that:

the hooks of the inner tent are wrapped around the frame and fixed to the rubber strap (hooks can break if not correctly fastened).

Frame layout

4 x side tubes

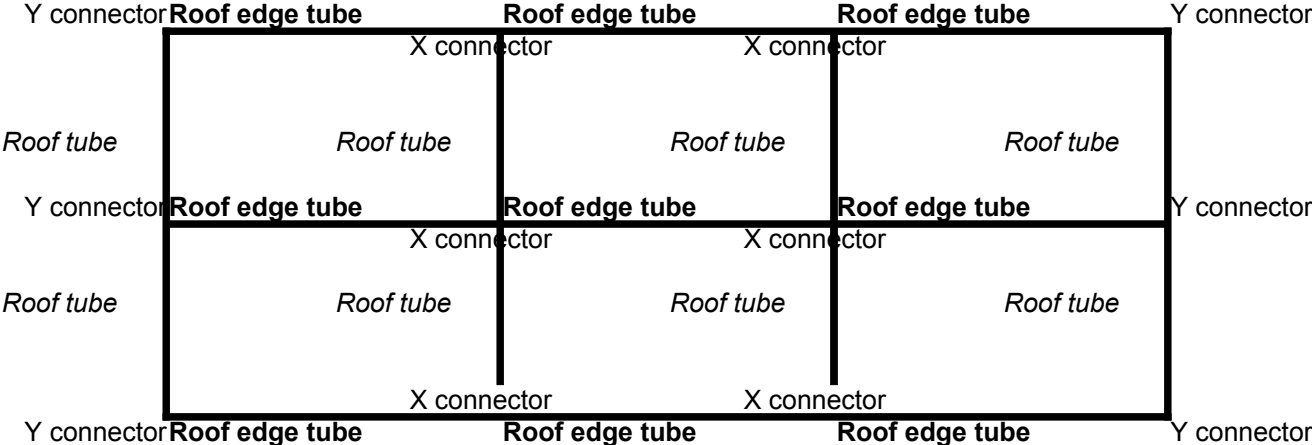

4 x side tubes